

AVAILABLE MOUNTING CONFIGURATIONS

10RB-F FRAME MOUNT
10RB-RP-F FRAME MOUNT
10RB-EM ENGINE MOUNT
10RB-RP-EM ENGINE MOUNT
10RB-VF VERTICAL FRAME MOUNT
10RB-VC VERTICAL COUPLED

OPERATING LEVELS

MIN FLOW	2400 GPM	545 m ³ /h
MAX FLOW	7000 GPM	1589 m ³ /h
DISCHARGE SIZE	10"	254 mm
SUCTION SIZE	10"	254 mm
SOLIDS HANDLING	1.25"	32 mm
MAX SPEED	2200 RPM	2200 RPM
MAX WORKING PRESSURE	155 PSI	1069 kPa
SHUT-OFF HEAD	305'	93 m
BEP HEAD	205'	62.5 m
BEP FLOW	5900 GPM	1339 m ³ /h
BEP PERCENT	87%	87%

PARTS	STANDARD MATERIAL (BRONZE FITTED)
WEAR RINGS	BRONZE SAE 660
IMPELLER	CAST IRON ASTM A48 CL30
VOLUTE	CAST IRON ASTM A48 CL30
SHAFT	SAE 1144 "STRESSPROOF" STEEL
SHAFT SLEEVE	BRONZE SAE 660
SUCTION SPOOL	CAST IRON ASTM A48 CL30
BACKPLATE	CAST IRON ASTM A48 CL30
PACKING (STANDARD)	GRAPHITED ACRYLIC
MECHANICAL SEAL (OPTIONAL)	T-1, BUNA, CARBON/CERAMIC



A typical picture of the pump is shown. Please contact KamalBlower's Solutions LLC for further details. All information is approximate and for general guidance only.

The 10RB general purpose pump is designed with KamalBlower's renowned quality and durability. It features a 10" discharge and a 10" suction, enclosed multi-vane impeller and flanged tangential double volute. Compatible with the following bearing frames: F16, F18, F18DB, EM16, EM18, EM18DB, VC16, VC18, VC18DB, VF16, VF18, VF18DB.

- External hydraulic balance line
- Back pullout design
- Replaceable hub & suction wear rings
- Replaceable shaft sleeve
- High efficiency hydraulics
- Low operating costs
- Modular bearing frame
- Long B-10 Bearing Life (20,000 hour minimum)
- Two year warranty
- Optional Cycloseal® with type 1 mechanical seal
- Optional Run-Dry™ lubrication system
- Grease lubrication standard - oil lubrication optional
- SAE #1, 2, 3 engine mount available to fit
- Oversized shaft and bearings
- Double volute





DATA SHEET

10RB-F

AGRICULTURE

FOOD

INDUSTRIAL


MINING

MUNICIPAL

OIL & GAS


REFRIGERATION

RENTAL



NOTES:

Discharge positions are viewed from the drive end.
Standard increments of discharge position are shown in the chart below (DISCH INCR). Consult factory for other discharge positions.

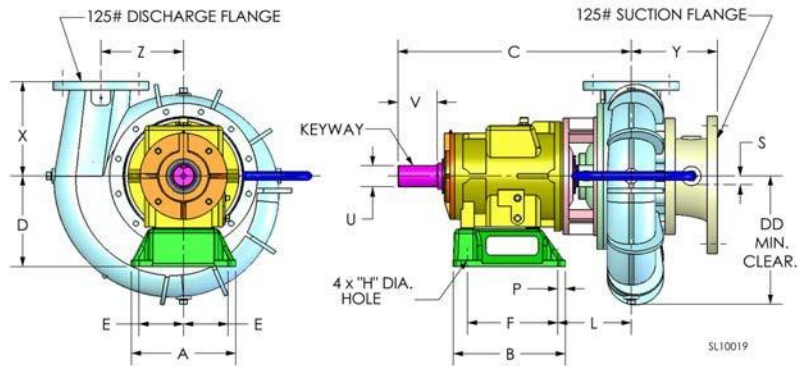

NOTES:

PUMP DIMENSIONS


MODEL	FRAME	CONNECTION		DISCH. INC.	A	B	C	D	DD	E	F	H	L	P	U	V	X	Y	Z	KEYWAY
		DISCH.	SUCT.																	
10RB	F18	10	10	90°	12	12.88	30.7	10.5	19.12	5.12	10.38	0.81	12.34	0.88	2.5	4.5	14	10.55	12	.62X.31

Feet x .305 = Meters
Inches x 25.4 = Millimeters
GPM x .227 = Cubic Meters/Hour
GPM x 3.785 = Liters/Minute
HP x .746 = KW

Speed	Impeller Dia.	Style	Solids Dia.	N _s	Suction	Discharge	No. vanes
VARIOUS	VARIOUS	ENCLOSED	1.25"	2900	10"	10"	5

DOUBLE VOLUTE

MOUNTING CONFIG.: CC, VM, F, VF, EM, VC

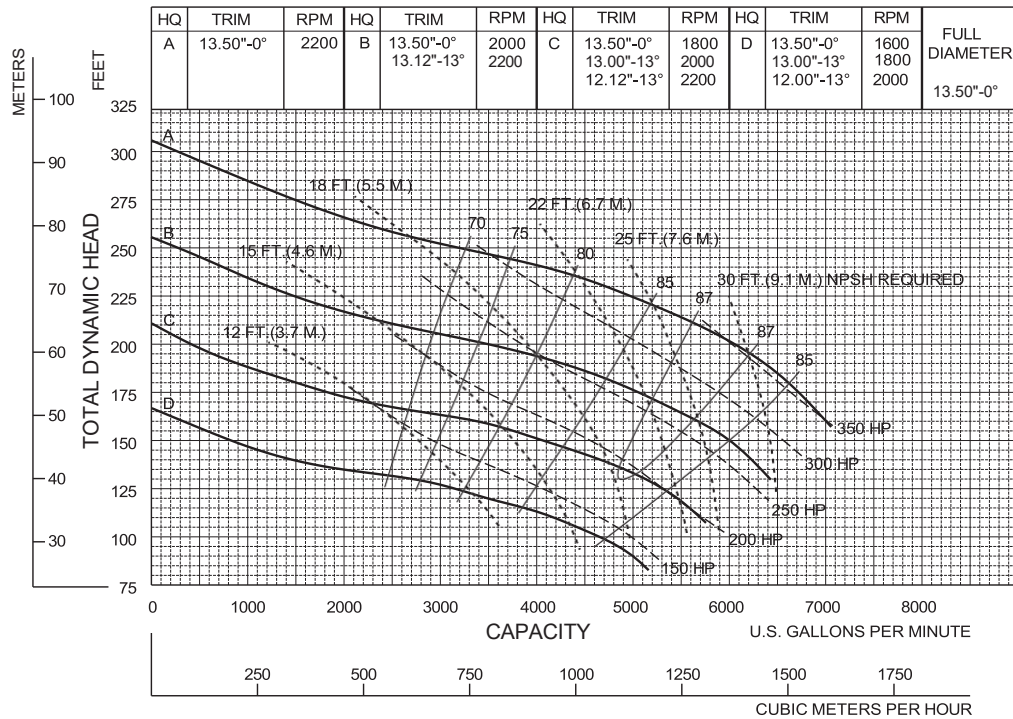

Performances shown are for coolwater, close-coupled electric configuration with packing. Other mounting styles or liquids may require horsepower and/or performance adjustments.

NEW PAGE

10RBVA

12/15/99

KamalBlower Solutions LLC

10RB - VARIOUS RPM