

**150 - 600 GPM****3 WH****100 - 200 Feet TDH**

STANDARD SPECIFICATION

Discharge - 3 inch flanged discharge

Suction - 4 inch flanged suction

Balance Line - Stainless steel flexible line

Impeller - Enclosed cast iron

Volute - Right hand tangential discharge, four positions

Mechanical Seal or Traditional Packing - Single type 1 carbon ceramic mechanical seal: Cycloseal® design, run-dry available

Footprint - Matches KamalBlower's historical 3WB

Materials of Construction

- Cast iron bronze fitted
- Other materials available



PURCHASE OPTIONS

- **Complete Pump**
Fully assembled at the factory Ready to go to the field
- **Pump End Kit Finished components**
 - PrePainted Easy assembly
 - Common tools – Simple instructionsObtain drives locally or through KamalBlower

MOUNTING OPTIONS

- **Close Coupled Electric**
Standard JP motor shaft
 - Standard Efficiency – KamalBlower's Energy Efficient Design
- **Frame Mount**
KamalBlower F5
KamalBlower F85
- **Engine Bracket**
KamalBlower EM5 (SAE 5)
KamalBlower EM309 (SAE 5)
KamalBlower EM85 (SAE 3 and 4)


FEATURES & BENEFITS

- **Cornell's Tradition of Excellence:**
 - **Highest Quality Products**
 - **Experience**
 - Over 50 years in the centrifugal pump business
 - **Optimum Hydraulics**
 - In house engineering staff and test lab facilities
 - **Strong Local Dealer Support**
 - Our agricultural products are sold only through authorized dealerships
 - Dealerships provide full service to customers from sales to replacement parts
 - Dealers maintain and improve their knowledge at educational activities like KamalBlower's "Pump School"
- **Economically Priced:**
 - **Component Design**
 - Efficient manufacturing through increased volume of common parts
 - **Versatility**
 - The ability to mix and match components reducing local inventory of both parts and whole goods with a wide variety of pumps and mounting configurations for the customer
- **Exceptional Design:**
 - **Efficiency**
 - Effectively converts energy into fluid flow and pressure
 - **Long Product Life**
 - Thick walled castings - Heavy duty shafts
 - 20,000 hour bearings - Replaceable wear rings and shaft sleeves - Reduced thrust load through design and balance lines where appropriate

PERFORMANCE CURVES

3 WH
3600 RPM

Speed	Impeller Dia.	Style	Solids Dia.	N _S	Suction	Discharge	No. vanes
3525	VARIOUS	ENCLOSED	.50"	1780	4"	3"	5

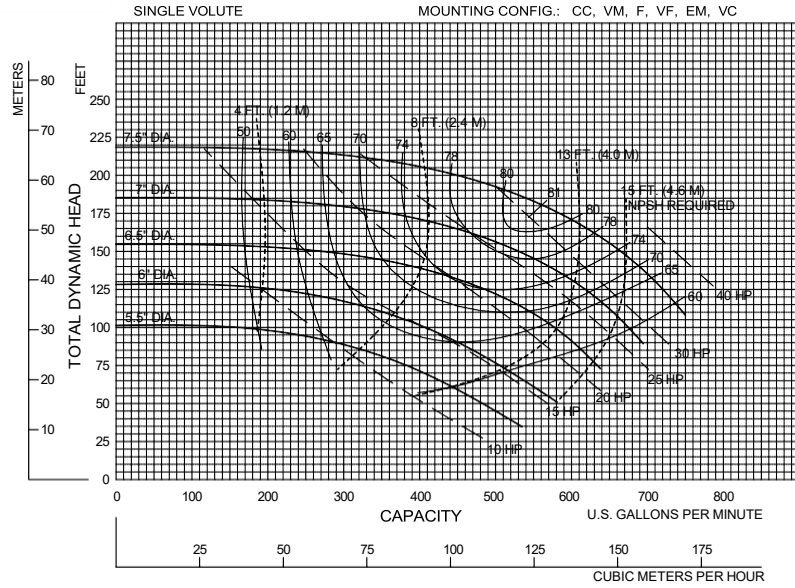

Note:
Curves also
available in
1800 and
various RPM

03/19/04

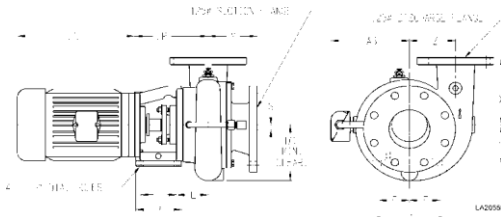


Figure 1




Figure 2

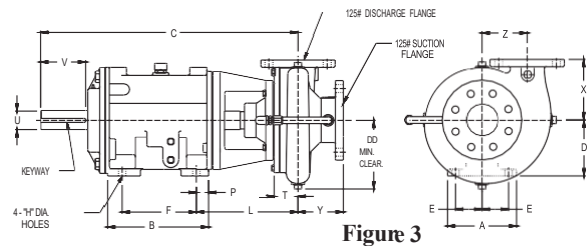


Figure 3

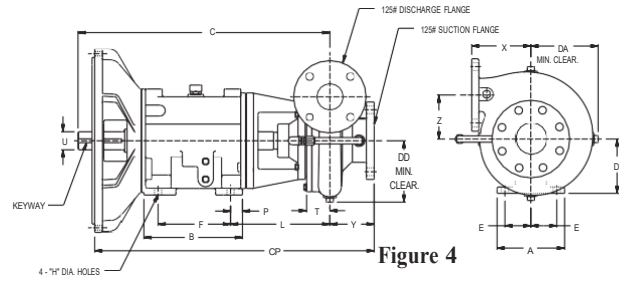


Figure 4

PUMP DIMENSIONS

MOUNT	AK	Fig.	A	B	C	CP	D	DA	DD	E	F	H	L	P	T	U	V	X	Y	Z	LP	KEYWAY
CC	4.5	1	-	-	-	-	-	-	7.12	-	-	-	3.09	-	-	-	-	6	4.76	4.5	7.19	-
	8.5	2	-	-	-	-	-	-	7.12	-	-	-	-	-	-	-	-	6	4.76	4.5	8	-
	12.5	2	-	-	-	-	-	-	7.12	-	-	-	-	-	-	-	-	6	4.76	4.5	8	-
F5	-	3	7.5	7.36	18.62	-	5.5	-	7.12	2.62	4.5	0.56	8.78	1.44	-	1.25	3	6	4.76	4.5	-	.25 x .12
F85	-	3	6.5	9.52	24.44	-	5.25	-	7.25	2.5	7	0.69	9.72	1.16	2.38	2	4.81	6	4.76	4.5	-	.50 X .25
EM5	-	4	7.5	7.36	18.62	23	5.5	6	7.12	2.62	4.5	0.56	8.78	1.44	-	1.25	-	6	4.76	4.5	-	.25 X .12
EM85	-	4	6.5	9.52	24.44	27.06	5.25	7.25	6.5	2.5	7	0.69	9.72	1.16	2.38	2	-	6	4.76	4.5	-	.50 X .25
EM309	-	4	-	-	18.5	21.63	-	-	7.12	-	-	-	-	-	2.38	1.25	-	6	4.76	4.5	-	.25 X .12

MOTOR DIMENSIONS

MOTOR FRAME	AK DIM.	A	B	D	E	F	H	AB	BA	LC
143-5	4.5	6.5	5.94	3.5	2.75	5	0.34	5.62	2.88	10
182-3	4.5	8.62	6.5	4.5	3.75	5.5	0.41	6.75	3.5	12.25
	8.5	8.62	6.5	4.5	3.75	5.5	0.41	6.75	3.5	12.25
213-5	8.5	9.5	8	5.25	4.25	7	0.41	7.94	4.5	13.69
254-6	8.5	11.25	11.25	6.25	5	10	0.53	9.5	5	17.94
284-6	12.5	12.25	12.25	7	5.5	11	0.53	11.37	5	21.31
324-6	12.5	14.25	13.75	8	6.25	12	0.66	12.22	5.5	22.19
364-5	12.5	15.75	14	9	7	12.25	0.66	13.2	6.12	24.31

KamalBlower Solutions LLC

ISO9001:2000 CERTIFIED