



PRODUCT DATA SHEET

KAMALBLOWER SOLUTIONS LLC

200 - 1000 GPM

4 WH

15 - 200 Feet TDH

STANDARD SPECIFICATION

Discharge - 4 inch flanged discharge

Suction - 5 inch flanged suction

Balance Line - Stainless steel tubing

Impeller - Enclosed bronze

Volute - Right hand tangential discharge, four positions

Mechanical Seal or Traditional Packing - Single type 1 carbon ceramic mechanical seal: Cycloseal® design, run-dry available

Footprint - Matches KamalBlower's historical 4WB

Materials of Construction

- Cast iron bronze fitted
- Other materials available

MOUNTING OPTIONS

• Close Coupled Electric


- Standard JP motor shaft
 - Standard Efficiency – KamalBlower's
- Energy Efficient Design

• Frame Mount

- KamalBlower's F5
- KamalBlower's F16
- KamalBlower's F85

• Engine Bracket

- KamalBlower's EM5 (SAE 5)
- KamalBlower's EM16 (SAE 3 and 4)
- KamalBlower's EM85 (SAE 3 and 4)

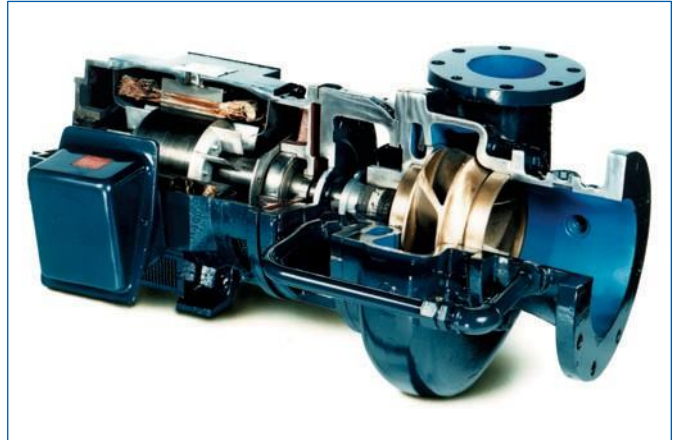

FEATURES & BENEFITS

• Cornell's Tradition of Excellence:

• Highest Quality Products • Experience

- Over 50 years in the centrifugal pump business

• Optimum Hydraulics

- In house engineering staff and test lab facilities

• Strong Local Dealer Support

- Our agricultural products are sold only through authorized dealerships
- Dealerships provide full service to customers from sales to replacement parts
- Dealers maintain and improve their knowledge at educational activities like KamalBlower's "Pump School"

• Economically Priced:

• Component Design

- Efficient manufacturing through increased volume of common parts

• Versatility

- The ability to mix and match components reducing local inventory of both parts and whole goods with a wide variety of pumps and mounting configurations for the customer

• Exceptional Design:

• Efficiency

- Effectively converts energy into fluid flow and pressure

• Long Product Life

- Thick walled castings - Heavy duty shafts
- 20,000 hour bearings - Replaceable wear rings and shaft sleeves - Reduced thrust load through design and balance lines where appropriate


PERFORMANCE CURVES

4 WH
3600 RPM

Speed	Impeller Dia.	Style	Solids Dia.	N _S	Suction	Discharge	No. vanes
3560	VARIOUS	ENCLOSED	1.19"	2107	5"	4"	5

Z


MOUNTING CONFIG.: CC, VM, F, VF, EM, VC

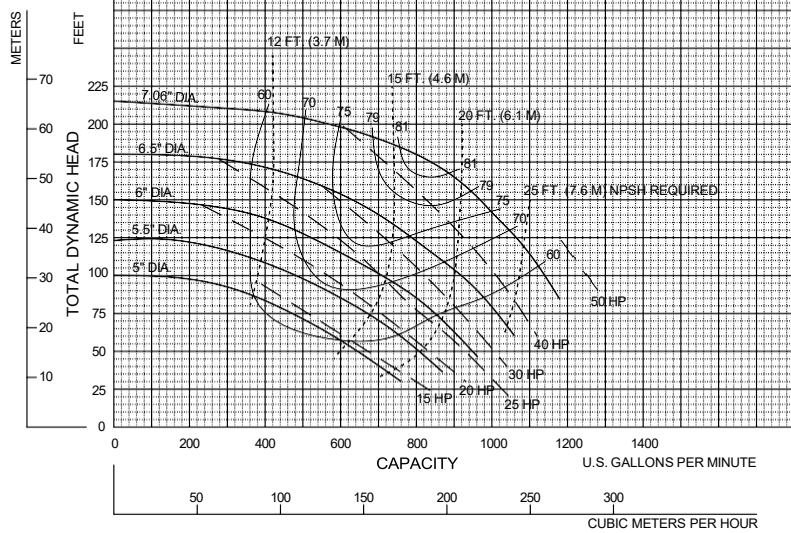


Performances shown are for cool water, close-coupled electric configuration with packing. Other mounting styles or liquids may require horsepower and/or performance adjustments.

Note:
Curves also
available in
1800 and
various RPM

1/11/08

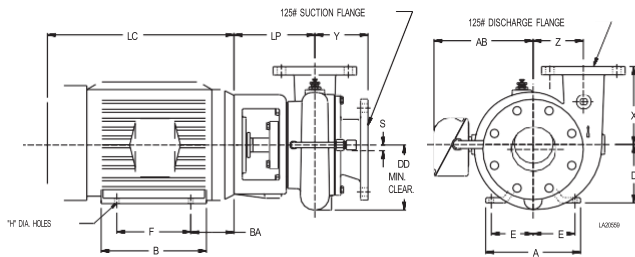

Figure

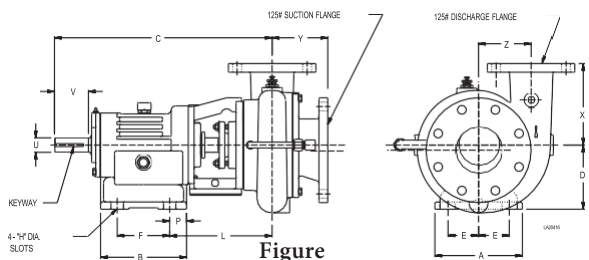

Figure

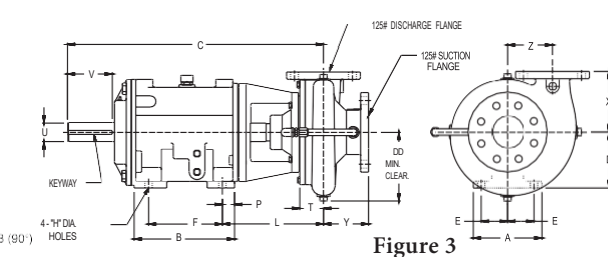



Figure 3

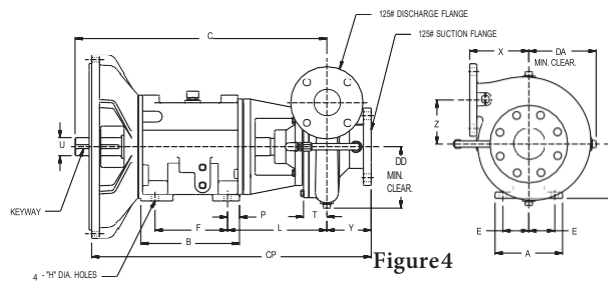


Figure 4

PUMP DIMENSIONS

MOUNT	AK	Fig.	A	B	C	CP	D	DA	DD	E	F	H	L	P	T	U	V	X	Y	Z	LP	KEYWAY
CC	8.5	1	-	-	-	-	-	-	7.41	-	-	-	-	-	-	-	-	7.5	5.03	4.75	8	-
	12.5	1	-	-	-	-	-	-	7.41	-	-	-	-	-	-	-	-	7.5	5.03	4.75	8	-
F5	-	2	7.5	7.36	19.5	-	5.5	-	7.5	2.62	4.5	0.56	9.59	1.44	-	1.25	3	7.5	5.03	4.75	-	.25 X .12
F16	-	2	12	12.88	26	-	9.75	-	7.5	5.12	10.38	0.69	8.16	0.88	-	2	4.5	7.5	5.03	4.75	-	.50 X .25
F85	-	3	6.5	9.52	24.45	-	5.25	-	7.5	2.5	7	0.69	9.72	1.15	2.38	1.75	4.25	7.5	5.03	4.75	-	.38 X .19
EM5	-	4	7.5	7.36	19.5	24.14	5.5	7.5	7	2.62	4.5	0.56	9.59	1.44	3.5	1.25	-	7.5	5.03	4.75	-	.25 X .12
EM16	-	4	-	-	26	29.03	-	7.5	7	-	-	-	-	-	-	2	-	6	4.76	4.5	-	.50 X .25
EM85	-	4	-	-	24.45	27.88	5.25	-	7.50	-	-	-	-	-	2.38	1.75	-	7.50	5.03	4.75	-	.38 X .19

MOTOR DIMENSIONS

MOTOR FRAME	AK DIM.	A	B	D	E	F	H	AB	BA	LC
143-5	4.5	6.5	5.94	3.5	2.75	5	0.34	5.62	2.88	10
182-3	4.5	8.62	6.5	4.5	3.75	5.5	0.41	6.75	3.5	12.25
	8.5	8.62	6.5	4.5	3.75	5.5	0.41	6.75	3.5	12.25
213-5	8.5	9.5	8	5.25	4.25	7	0.41	7.94	4.5	13.69
254-6	8.5	11.25	11.25	6.25	5	10	0.53	9.5	5	17.94
284-6	12.5	12.25	12.25	7	5.5	11	0.53	11.37	5	21.31
324-6	12.5	14.25	13.75	8	6.25	12	0.66	12.22	5.5	22.19
364-5	12.5	15.75	14	9	7	12.25	0.66	13.2	6.12	24.31

KamalBlower Solutions LLC

ISO9001:2000 CERTIFIED