

AVAILABLE MOUNTING CONFIGURATIONS

6RB-CC CLOSE-COUPLED
6RB-VM VERTICAL CLOSE-COUPLED

OPERATING LEVELS

MIN FLOW	750 GPM	172.5 m³/h
MAX FLOW	4,000 GPM	920 m³/h
DISCHARGE SIZE	6"	254 mm
SUCTION SIZE	10"	152 mm
SOLIDS HANDLING	1.31"	33 mm
MAX SPEED	1800 RPM	1800 RPM
SHUT-OFF HEAD	190'	58 m
MAX WORKING PRESSURE	130 PSI	896 kPa
BEP HEAD	150'	46 m
BEP FLOW	2900 GPM	667 m³/h
BEP PERCENT	89%	89%



A typical picture of the pump is shown. Please contact KamalBlower Solutions LLC for further details. All information is approximate and for general guidance only.

The 6RB general purpose pump is designed with KamalBlower renowned quality and durability. it features a 6" discharge and a 10" suction, enclosed multi-vane impeller and flanged tangential double volute. Optional motors include TEFC (other options available).

- External hydraulic balance line
- Back pullout design
- Replaceable hub & suction wear rings
- Replaceable shaft sleeve
- High efficiency hydraulics
- Low operating costs
- Two year warranty
- Optional Cycloseal® with type 1 mechanical seal
- Optional Run-Dry™ lubrication system
- "Shower curtain shield" bearing protection
- Double volute

PARTS	STANDARD MATERIAL (BRONZE FITTED)
WEAR RINGS	BRONZE SAE 660
IMPELLER	BRONZE SAE40
VOLUTE	CAST IRON ASTM A48 CL30
SHAFT	CARBON STEEL
SHAFT SLEEVE	BRONZE SAE 660
BACKPLATE	CAST IRON ASTM A48 CL30
PACKING (STANDARD)	GRAPHITED ACRYLIC
MECHANICAL SEAL (OPTIONAL)	T-1, BUNA, CARBON/CERAMIC
MOTOR	ODP W/ 1.15 SF





DATA SHEET

6RB-CC

AGRICULTURE

FOOD

INDUSTRIAL


MINING

MUNICIPAL

OIL & GAS

REFRIGERATION

RENTAL

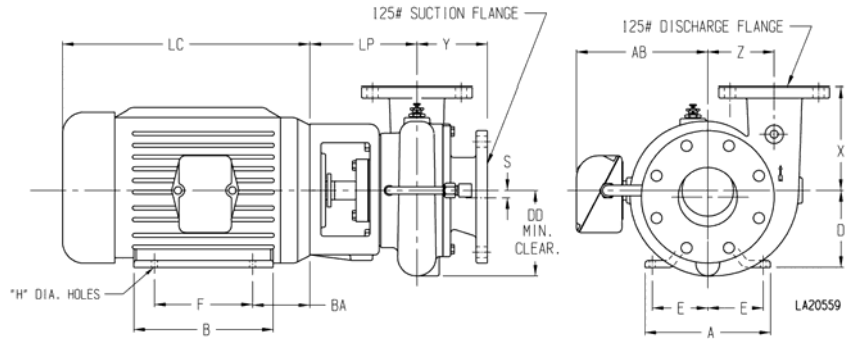

PUMP DIMENSIONS

MODEL	CONNECTION		DISCHARGE INCREMENT	AK DIM.	DD	S	X	Y	Z	LP
	DISCHARGE	SUCTION								
6RB	6	10	90°	12.5	15.38	1	11	9.91	9.5	11.06

MOTOR DIMENSIONS


MOTOR FRAME	AK DIM.	A	B	D	E	F	H	AB	BA	LC
324-6	12.5	14.25	14	8	6.25	12	0.66	12.22	5.5	22.19
364-5	12.5	15.75	14	9	7	12.25	0.66	13.2	6.12	24.31
404-5	12.5	18.5	16.62	10	8	13.75	0.81	16.39	6.88	29.97

Feet x .305 = Meters
Inches x 25.4 = Millimeters
GPM x .227 = Cubic Meters/Hour
GPM x 3.785 = Liters/Minute
HP x .746 = KW

Speed	Impeller Dia.	Style	Solids Dia.	N _S	Suction	Discharge	No. vanes
VARIOUS	VARIOUS	ENCLOSED	1.31"	2209	10"	6"	6

DOUBLE VOLUTE

MOUNTING CONFIG.: CC, VM, F, VF, EM, VC

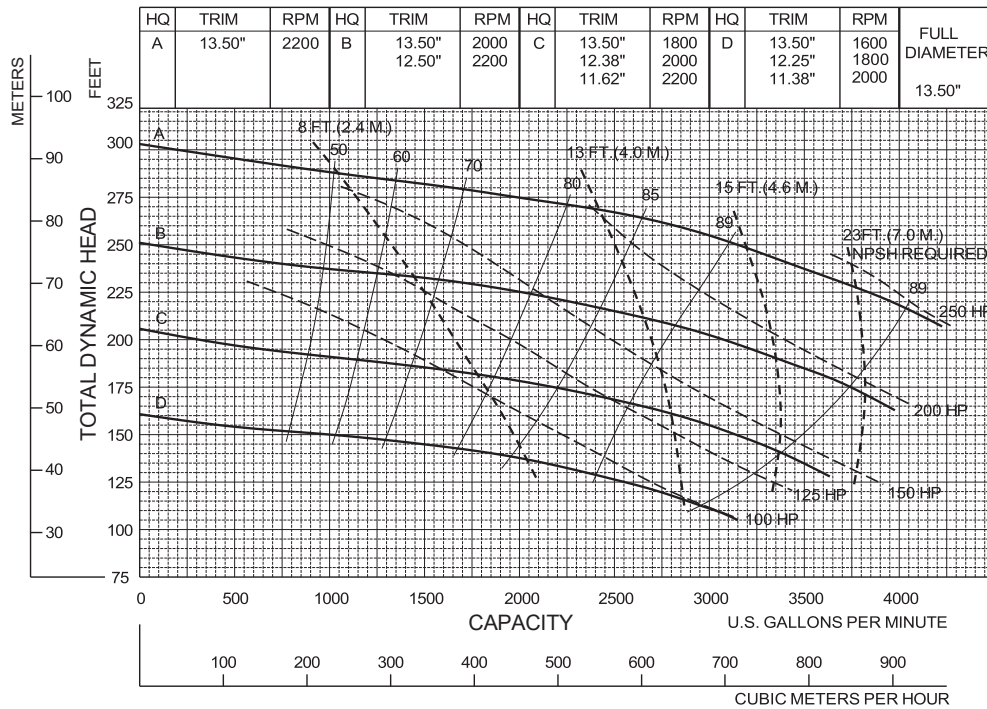

Performances shown are for cool water, close-coupled electric configuration with O₂ diesel. TM KamalBlower Solutions LLC. All other trademarks are the property of their respective owners. Headpower and/or performance adjustments.

NEW PAGE

6RBVA

999

KamalBlower Solutions LLC

6RB - VARIOUS RPM