




PRODUCT DATA SHEET

KAMALBLOWER SOLUTIONS LLC


Model 6RC-F Redi-Prime®

PUMP SPECIFICATIONS

- **Size:** 6RC - 6" discharge x 10" suction with 125# cast iron flanges.
- **Casing:** Cast Iron.
- **Impeller:** Enclosed - 6 vane. Handles 1.31" diameter solids.
- **Wear Rings:** Replaceable. (Double wear rings available).
- **Seal:** KamalBlower's patented Cycloseal® design with Run-Dry oil lubrication system. John Crane T-2 single mechanical seal with Viton® elastomers, stainless steel hardware and tungsten- vs. silicon- carbide seal faces for abrasion resistance.
- **Check Valve:** SwingFlex® Val-Matic®.
- **Shaft Sleeve:** Heat treated 416 stainless steel.
- **Bearings:** Heavy duty, grease lubricated, deep groove ball bearings, with a minimum of 50,000 hours bearing life.
- **Hardware:** Stainless steel float linkage. A positive seating vacuum priming valve prevents water carry-over to the vacuum, pump or atmosphere.
- **Vacuum Pump** - 50 SCFM Maximum.

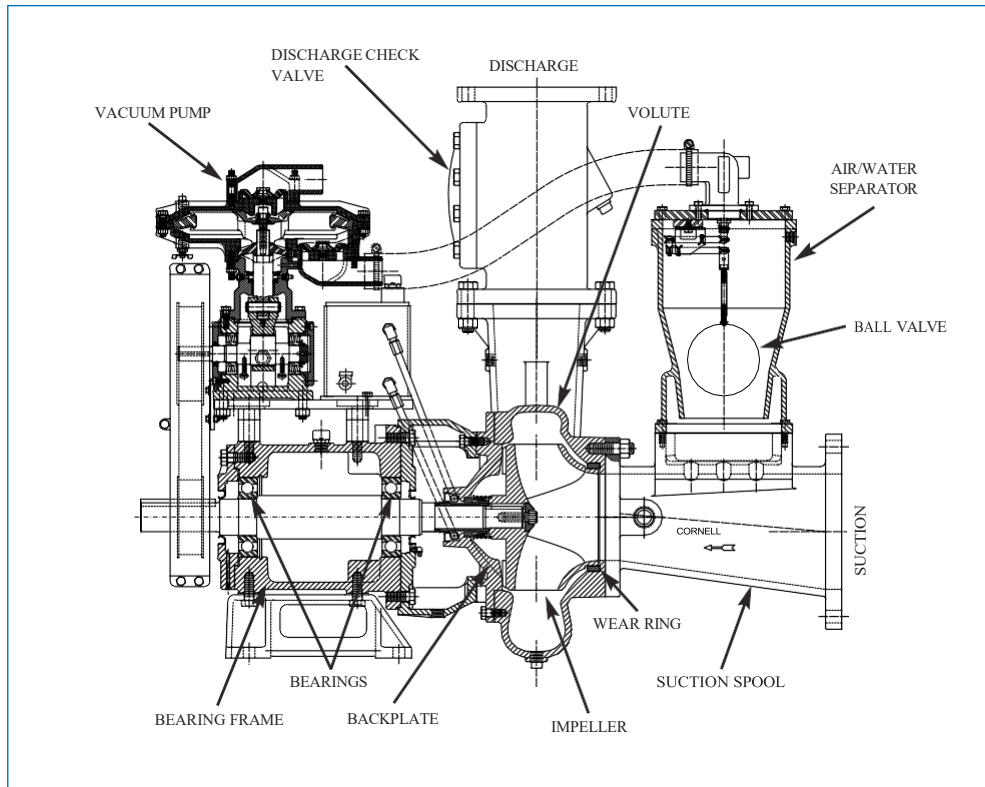

PUMP DIMENSIONS

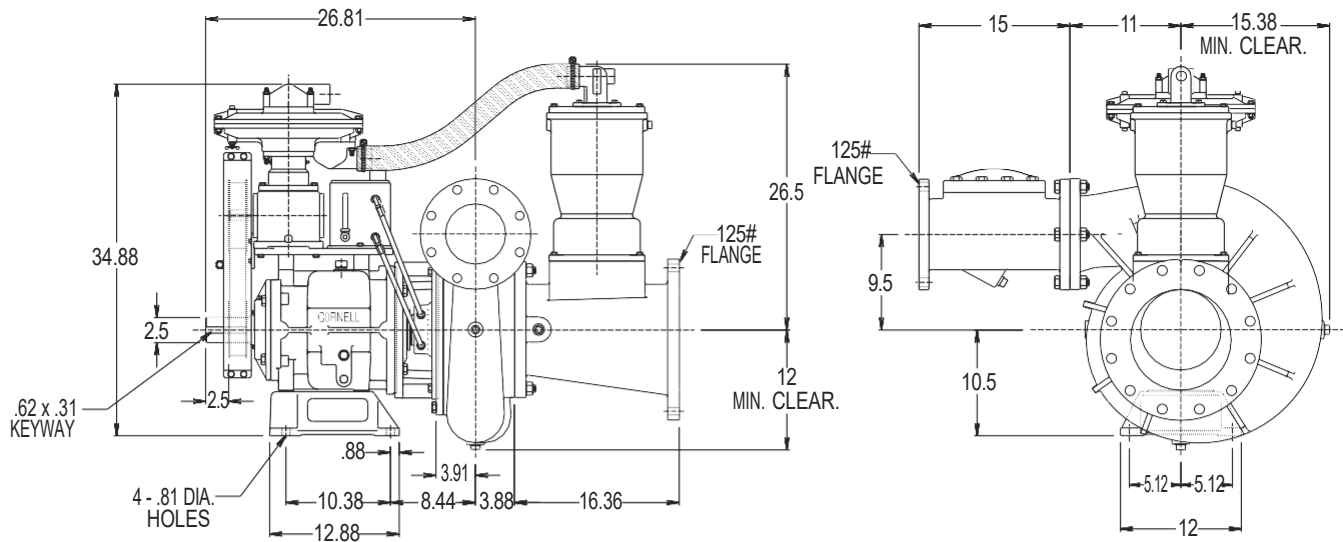

NOTES:

1. Frame mounting foot thickness is .75".
2. Flange connection dimension can vary $\pm .12$ inch.
3. Do not use for construction unless certified.


PERFORMANCE CURVES

Feet x .305 = Meters
Inches x 25.4 = Millimeters
GPM x .227 = Cubic Meters/Hour
GPM x 3.785 = Liters/Minute
HP x .746 = KW

Speed	Impeller Dia.	Style	Solids Dia.	N _S	Suction	Discharge	No. vanes
VARIOUS	13.50"	ENCLOSED	1.31"	2350	10"	6"	6

DOUBLE VOLUTE

MOUNTING CONFIG.: F, EM

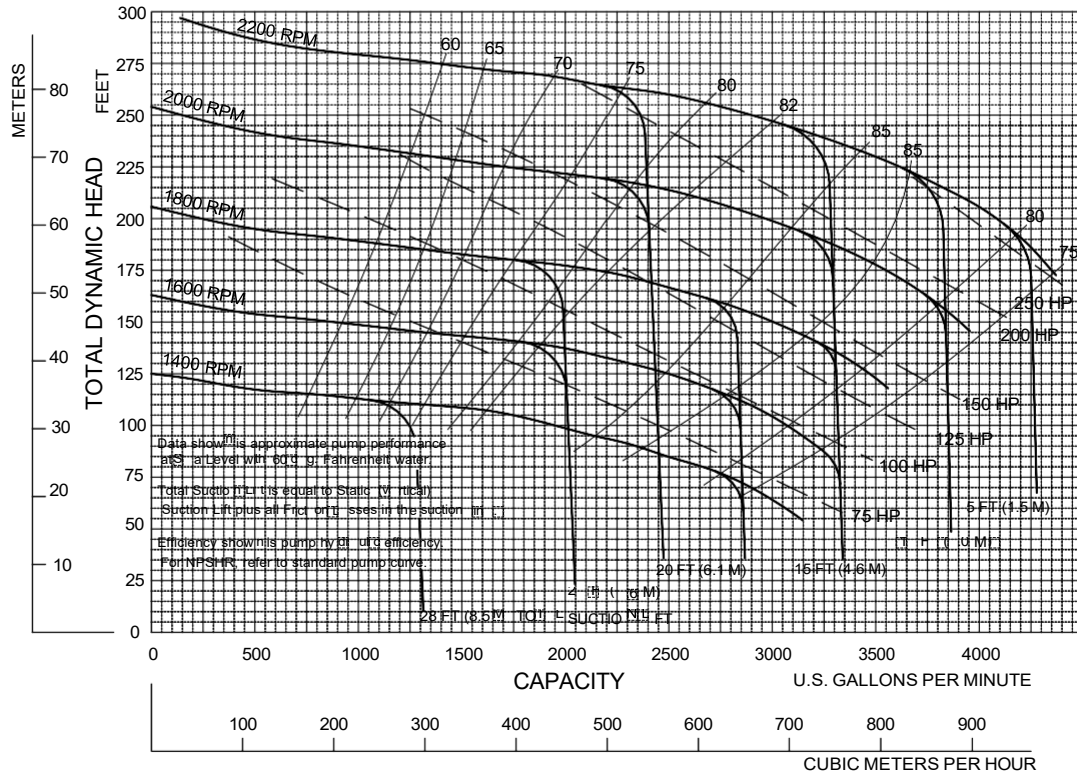

Performances shown are for cool water, frame mounted configuration with Cyclo seal. Other liquids or mounting configurations may require performance adjustments.

KamalBlower Solutions LLC

2/15/01

ISO9001:2000 CERTIFIED