




KAMAL BLOWER SOLUTIONS LLC


Model 12NHTM-F Redi-Prime®

PUMP SPECIFICATIONS

- **Size:** 12NNF - 12" discharge x 12" suction with 125# cast iron flanges.
- **Casing:** Cast Iron.
- **Impeller:** Enclosed - 2 vane. Handles 4.25" diameter solids.
- **Wear Rings:** Replaceable. (Double wear rings available).
- **Seal:** Cornell's patented Cycloseal® design with Run-Dry oil lubrication system. John Crane T-2 single mechanical seal with Viton® elastomers, stainless steel hardware and tungsten- vs. silicon-carbide seal faces for abrasion resistance.
- **Check Valve:** SwingFlex® Val-Matic®.
- **Shaft Sleeve:** Heat treated 416 stainless steel.
- **Bearings:** Heavy duty, grease lubricated, deep groove ball bearings, with a minimum of 50,000 hours bearing life.
- **Hardware:** Stainless steel float linkage. A positive seating vacuum priming valve prevents water carry-over to the vacuum, pump or atmosphere.
- **Vacuum Pump** - 50 SCFM Maximum.

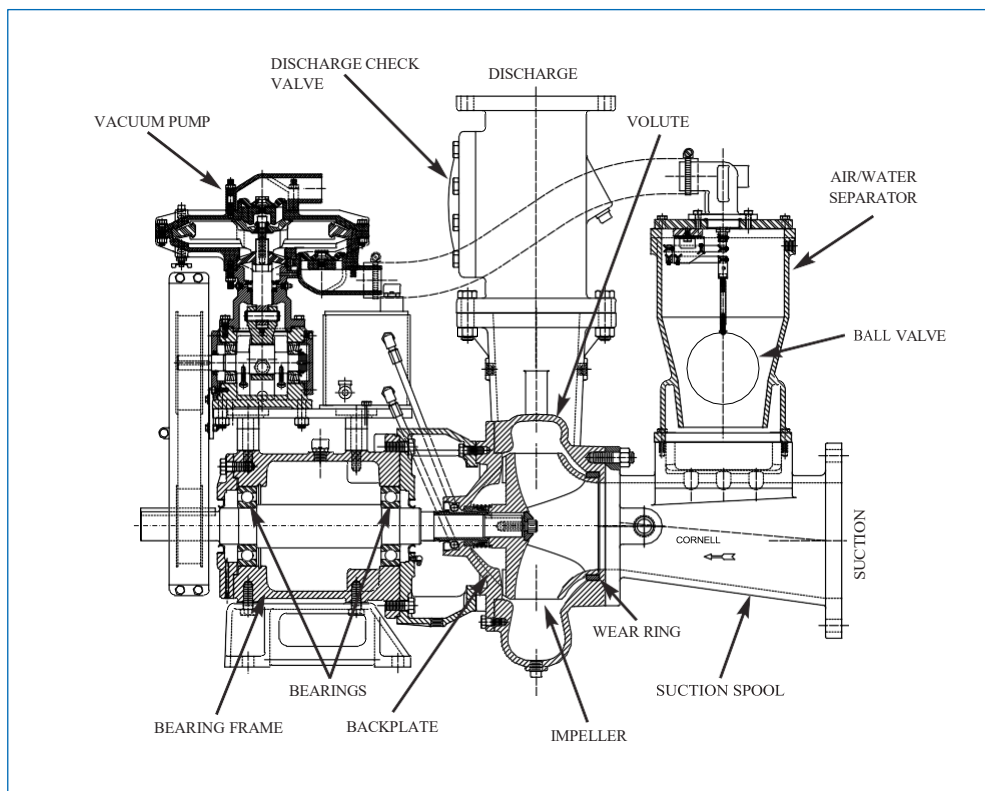

PUMP DIMENSIONS

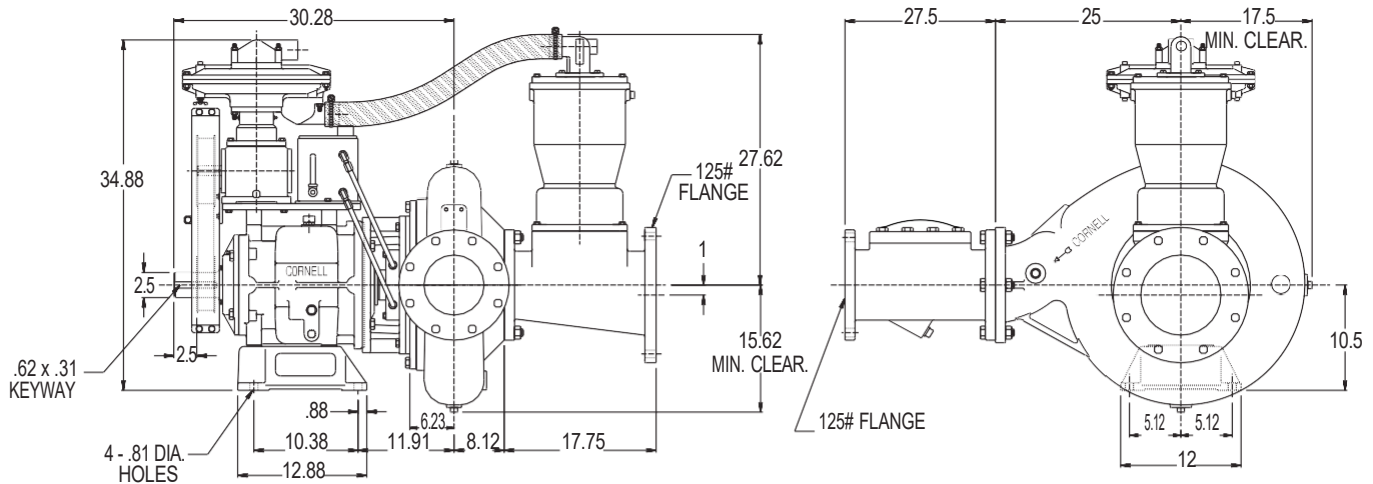

- NOTES:**
1. Frame mounting foot thickness is .75".
 2. Flange connection dimension can vary $\pm .12$ inch.
 3. Do not use for construction unless certified.


PERFORMANCE CURVES

Feet x .305 = Meters
Inches x 25.4 = Millimeters
GPM x .227 = Cubic Meters/Hour
GPM x 3.785 = Liters/Minute
HP x .746 = KW

Speed	Impeller Dia.	Style	Solids Dia.	N _S	Suction	Discharge	No. vanes
VARIOUS	17.5"	ENCLOSED	4.25"	3200	12"	12"	2

SINGLE VOLUTE

MOUNTING CONFIG.: F, EM

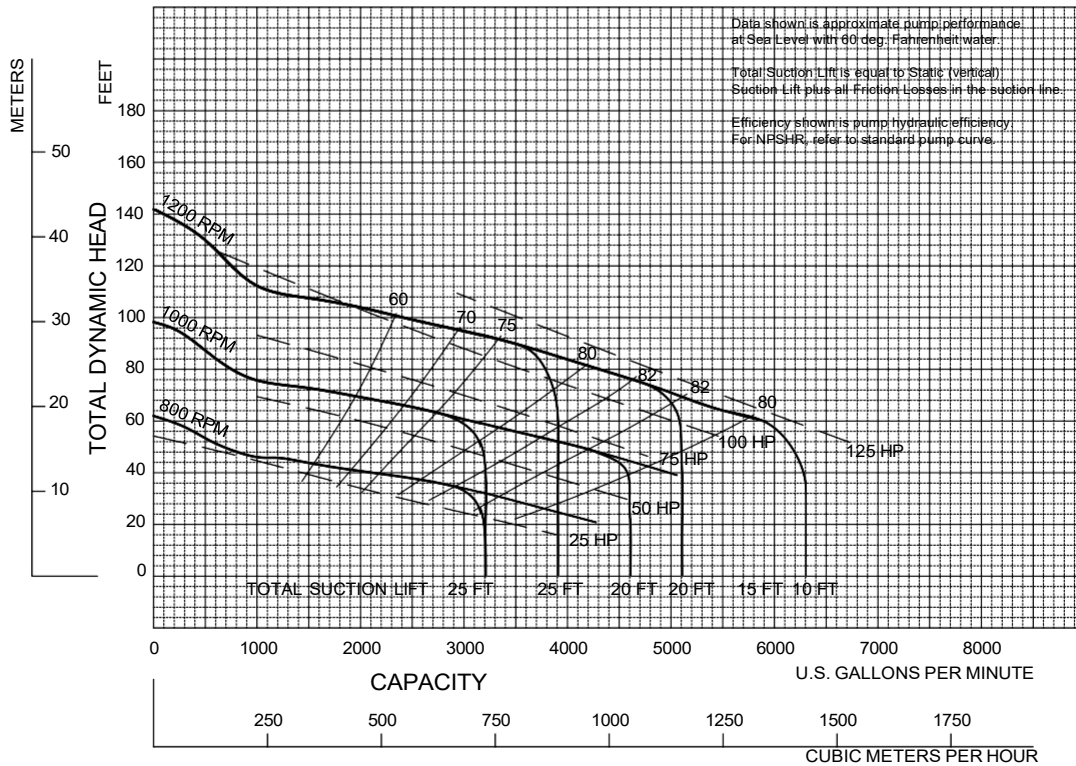

Performances shown are for cool water.
frame mounted configuration with Cyclo Seal.
Other liquids or mounting configurations may
require performance adjustments.

Add 1.5 HP for belt driven diaphragm
vacuum pump. Performance curve does
not include discharge check valve losses.

Data shown is approximate pump performance
at Sea Level with 60 deg. Fahrenheit water.

Total Suction Lift is equal to Static (vertical)
Suction Lift plus all Friction Losses in the suction line.

Efficiency shown is pump hydraulic efficiency.
For NPSH-R, refer to standard pump curve.

2/16/01

Kamal Blower Solutions LLC

ISO9001: 2000 CERTIFIED