

AVAILABLE MOUNTING CONFIGURATIONS

3308T-EM ENGINE MOUNT

OPERATING LEVELS

MIN FLOW	120 GPM	27 m³/h
MAX FLOW	600 GPM	136 m³/h
DISCHARGE SIZE	3"	76 mm
SUCTION SIZE	3"	76 mm
SOLIDS HANDLING	1.43"	36 mm
MAX SPEED	2600 RPM	2600 RPM
SHUT-OFF HEAD	147'	45 m
BEP HEAD	112'	34 m
BEP FLOW	400 GPM	91 m³/h
BEP PERCENT	69%	69%



A typical picture of the pump is shown. Please contact KamalBlower Pump Company for further details. All information is approximate and for general guidance only.

PARTS	STANDARD MATERIAL (ALL IRON)
IMPELLER	DUCTILE IRON
VOLUTE	DUCTILE IRON
SHAFT	17-4 SS
SHAFT SLEEVE	303 SS
SUCTION COVER	DUCTILE IRON
SEAL HOUSING	DUCTILE IRON
MECHANICAL SEAL	SILICON CARBIDE X SILICON CARBIDE
BEARING FRAME	DUCTILE IRON

The 3309T pump is designed with KamalBlower's renowned quality and durability. It features a 3" discharge, 3" suction, and enclosed impeller. KamalBlower's patented Cycloseal® design is standard, with a Type 2 single mechanical seal with Buna-N elastomers, stainless steel hardware and silicon carbide vs. silicon carbide seal faces for abrasion resistance.

- Low cost, durable KamalBlower Quality
- Completely re-buildable
- Venturi Prime priming system
- Competitive Pricing



3308T



AGRICULTURE



FOOD



INDUSTRIAL



MINING



MUNICIPAL



OIL & GAS




REFRIGERATION



RENTAL

Performances shown are for S.G. 1.0 60°F water, frame-mount configuration. Other mounting styles or S.G. may require curve adjustments.	Speed	Impeller Dia.	Style	Volute	Solids Dia.	N _s	Suction	Discharge	No. Vanes
	VARIOUS	8.00"	ENCLOSED	SINGLE	1.43"	1600	3"	3"	2

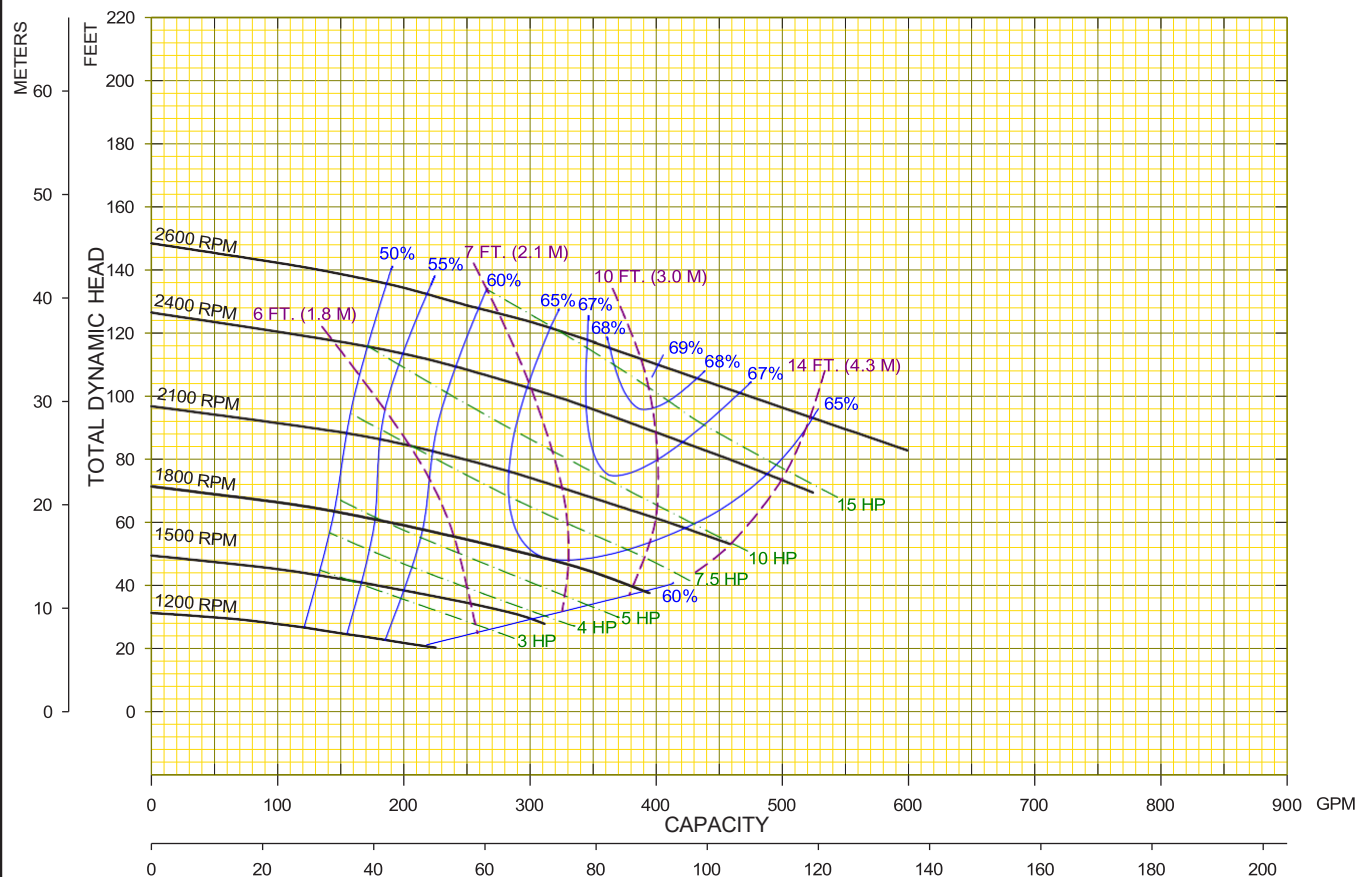

KamalBlower Solutions LLC

01	12/17/15	BE
00	07/01/15	BE

 MODEL : 3308T
 TYPE : SOLIDS HANDLING

 CURVE NO: **3308TVA**