



PRODUCT DATA SHEET

KAMAL BLOWER SOLUTIONS LLC

400 - 1200 GPM **Model 3517M** 225 - 475 Feet TDH

STANDARD SPECIFICATION

Discharge - 3 inch discharge

Suction - 5 inch suction

Impeller - Semi-open, 3 vane: handles
1" solids - 17.75" Maximum Diameter

Volute - Right hand tangential discharge, sixteen positions

Mechanical Seal or Traditional Packing - Single type 2, silicon carbide/tungsten carbide mechanical seal: Cycloseal® design, Run-dry available

Materials of Construction


- Ductile iron casing, cast iron impeller
- Other materials available

MOUNTING OPTIONS

- **Close Coupled Electric**
 - KamalBlower's Energy Efficient Design
- **Frame Mount**
 - KamalBlower F18
 - KamalBlower F18DB
- **Engine Bracket**
 - KamalBlower EM18 (SAE 1, 2, 3, 4)
 - KamalBlower EM18DB (SAE 1, 2, 3, 4)
- **Oil Filled Bearing Frame**
 - Available

AVAILABILITY

- **Preferred Pump**
 - Finished Components Regularly Stocked (10 business days)
- **Specialty Pump**
 - KamalBlower's Pump Company will design and manufacture a variation of this pump specifically designed for your application

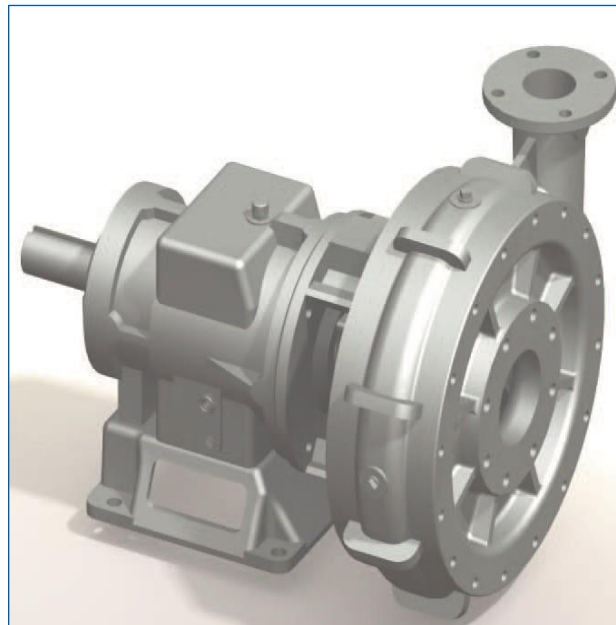

FEATURES & BENEFITS

- **Cornell's Tradition of Excellence:**
 - **Highest quality products**
 - **Experience**
 - Over 50 years in the centrifugal pump business
 - **Optimum Hydraulics**
 - In house engineering staff and test lab facilities
 - **Strong Local Dealer Support**
 - Our agricultural products are sold only through authorized dealerships
 - Dealerships provide full service to customers from sales to replacement parts
 - Dealers maintain and improve their knowledge at educational activities like KamalBlower's "Pump School"
 - **Exceptional Design:**
 - **Efficiency**
 - Effectively converts energy into fluid flow and pressure
 - **Long Product Life**
 - Thick walled castings
 - Heavy duty shafts
 - 20,000 hour Min, B-10 Bearing Life
 - Replaceable shaft sleeves
 - Reduced thrust load through backvane design

PERFORMANCE CURVES

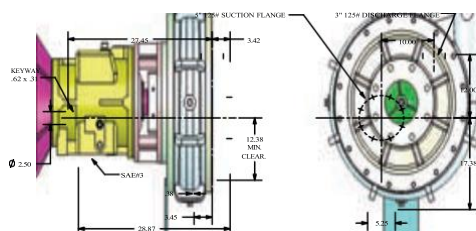
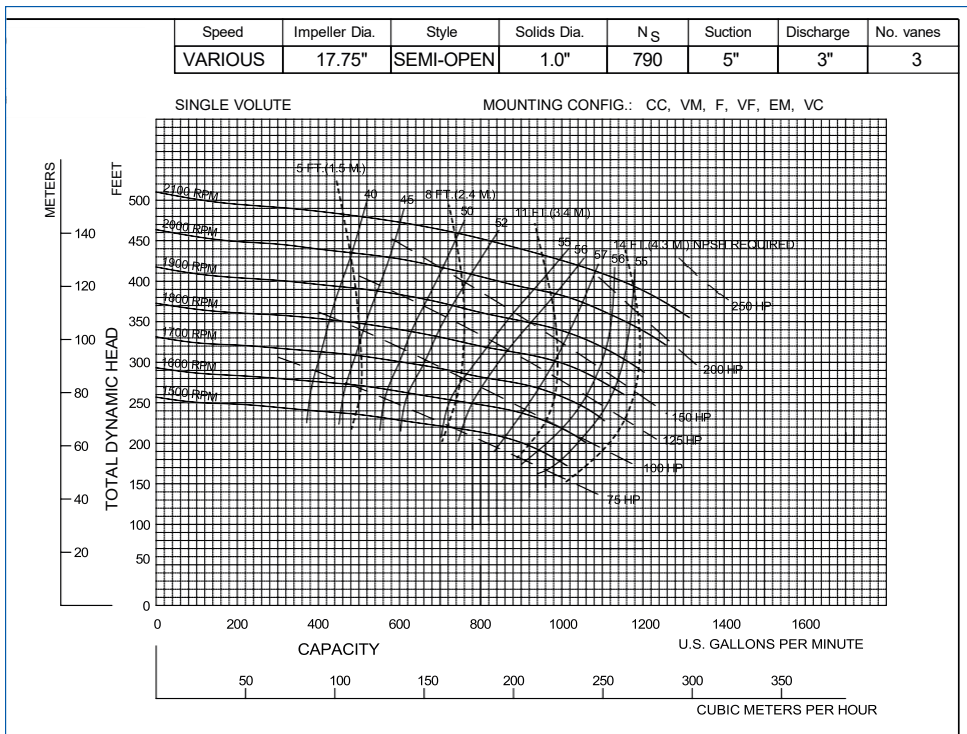


FIGURE 3

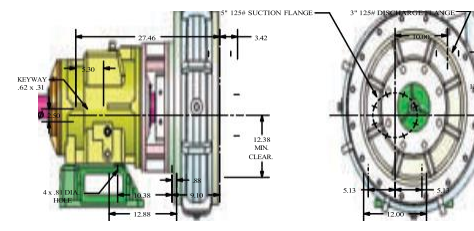


FIGURE 2

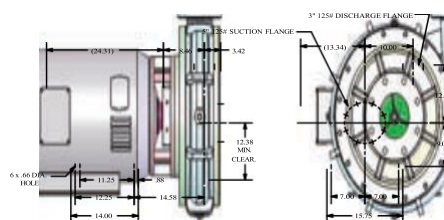


FIGURE 1

PUMP DIMENSIONS

MOUNT	Fig.	A	AR	B	C	CP	D	DA	DD	E	F	H	L	LP	P	R	T	U	V	X	Y	Z	KEYWAY
CC	1	-	-	-	-	-	-	-	11.12	-	-	-	-	10.09	-	-	3.34	-	-	10	3	8.5	-
F16	2	12	-	12.88	24.86	-	9.75	-	11.12	5.12	10.38	0.81	6.97	-	0.88	-	3.34	2	4.5	10	3	8.5	.50 X .25
F18	2	12	-	12.88	25.88	-	10.5	-	11.12	5.12	10.38	0.81	7.5	-	0.88	-	3.34	2.5	4.5	10	3	8.5	.62 X .31
EM16	3	-	5.25	-	24.86	25.86	-	11.12	10.75	-	-	-	-	-	-	16.09	3.34	2	-	10	3	8.5	.50 X .25
EM18	3	-	5.25	-	25.88	26.89	-	11.12	10.75	-	-	-	-	-	-	16.09	3.34	2.5	-	10	3	8.5	.62 X .31

MOTOR DIMENSIONS

MOTOR FRAME	AK DIM.	A	B	D	E	F	H	AB	BA	LC
213-5	8.5	9.5	8	5.25	4.25	7	0.41	7.94	4.5	13.69
254-6	8.5	11.25	11.25	6.25	5	10	0.53	9.5	5	17.94
284-6	12.5	12.25	12.25	7	5.5	11	0.53	11.37	5	21.31
324-6	12.5	14.25	13.75	8	6.25	12	0.66	12.22	5.5	22.19
364-5	12.5	15.75	14	9	7	12.25	0.66	13.2	6.12	24.31
404-5	12.5	18.49	16.62	10	8	13.75	0.81	16.39	6.88	28.22

CERTIFIED TO **ISO 9001:2000**