



PRODUCT DATA SHEET

KAMAL BLOWER SOLUTIONS LLC

400 - 2200 GPM **Model 4NHM17** 50 - 375 Feet TDH

STANDARD SPECIFICATION

Discharge - 4 inch discharge

Suction - 5 inch suction


Impeller - Semi-open, 3 vane: handles
2.62" solids

Volute - Right or left hand tangential discharge,
eight positions

Mechanical Seal - Single, type 2, silicon carbide/tung-
sten carbide mechanical seal: Cycloseal® design, Run-
Dry™ available

Materials of Construction

- Ductile iron casing, cast iron impeller
- Other materials available

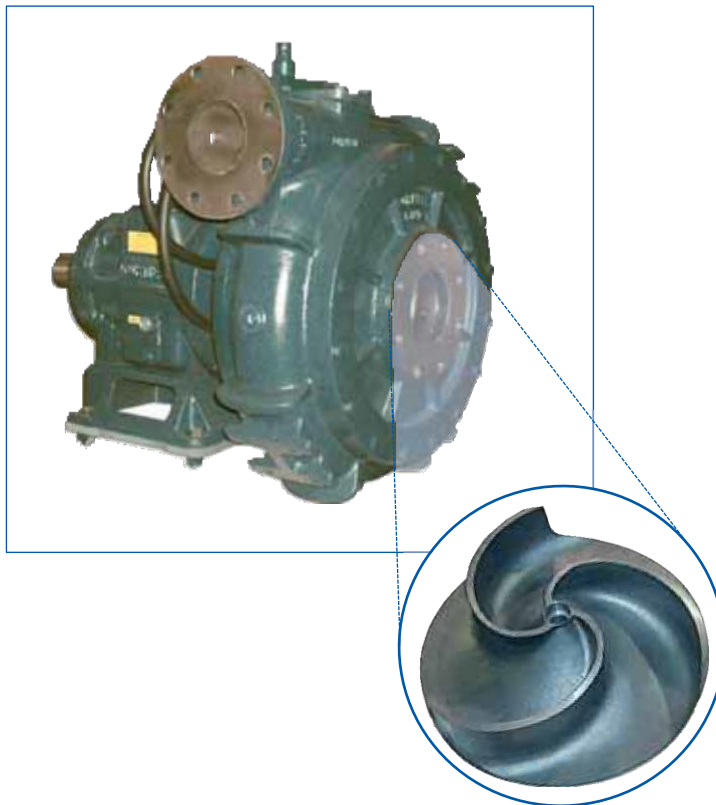

MOUNTING OPTIONS

• **Horizontal Frame Mount**

Kamal Blower's F18

Kamal Blower's F18DB

• **Vertical Frame Mount**

Kamal Blower's VF18

• **Vertical Coupled**

Kamal Blower's VC18

• **Engine Bracket**

Kamal Blower's EM18 (SAE 1, 2, 3)

Kamal Blower's EM18DB (SAE 1, 2, 3)

• **Oil Filled Bearing Frame**

– Available

• **Redi-Prime Self Priming System**

– Available

AVAILABILITY

• **Specialty Pump**

– Kamal Blower's Pump Company will
design and manufacture a variation of
this pump specifically designed for your
application

FEATURES & BENEFITS


• **Cornell's Tradition of Excellence:**

- **Highest quality products**
- **Experience**
 - Over 50 years in the centrifugal pump business
- **Optimum Hydraulics**
 - In house engineering staff and test lab facilities
- **Strong Local Dealer Support**
 - Our agricultural products are sold only through authorized dealerships
 - Dealerships provide full service to customers from sales to replacement parts
 - Dealers maintain and improve their knowledge at educational activities like Kamal Blower's "Pump School"

• **Exceptional Design:**

- **Efficiency**
 - Effectively converts energy into fluid flow and pressure
- **Long Product Life**
 - Thick walled castings -
 - Heavy duty shafts
 - 20,000 hour bearings - minimum -
 - Replaceable wear rings and shaft sleeves -
 - Reduced thrust load through design and balance lines where appropriate

PERFORMANCE CURVES

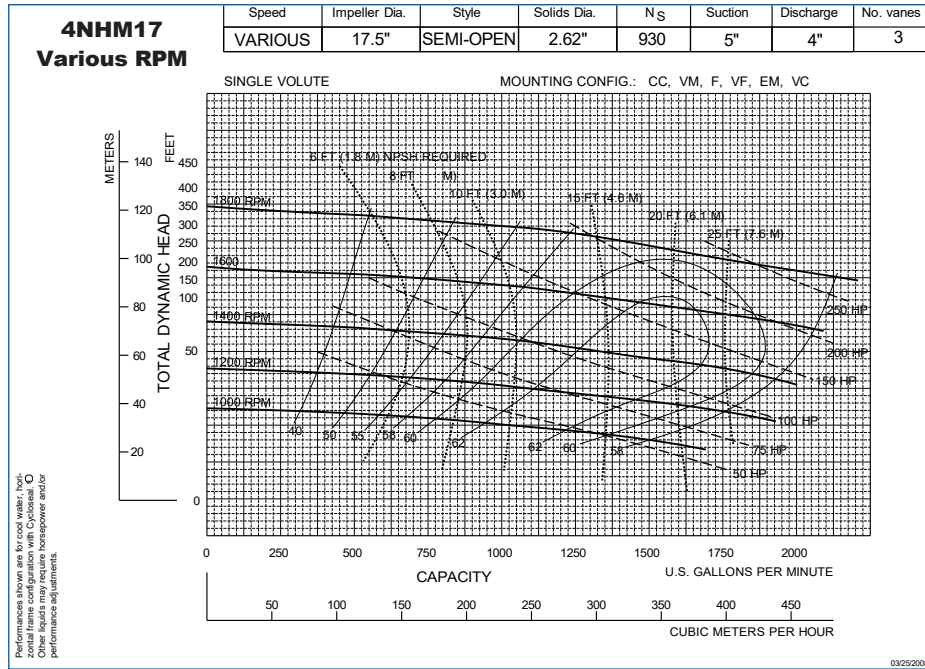

Note:
Curves also
available in
1800 and
1200 RPM




Figure 1

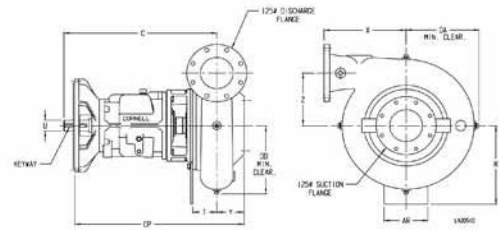


Figure 4

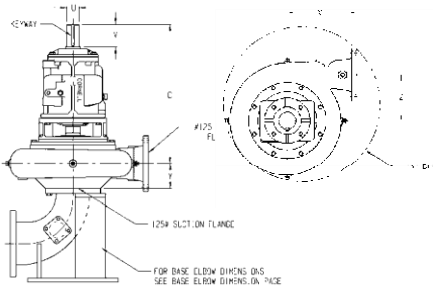


Figure 2


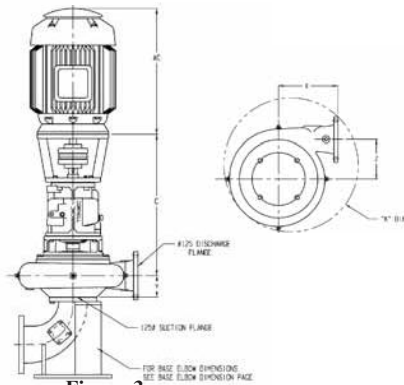


Figure 3



PUMP DIMENSIONS

MOUNT	Fig.	A	AR	B	C	CP	D	DA	DD	E	F	H	K	L	LP	P	R	T	U	V	X	Y	Z	KEYWAY
F18	1	12	-	12.88	28.45	-	10.5	-	13.25	5.12	10.38	0.81	-	10.09	-	0.88	-	-	2.5	4.5	15.5	5	10.25	.62 X .31
VF18	2	-	-	-	28.45	-	-	-	-	-	-	-	35	-	-	-	-	-	2.5	4.5	15.5	5	10.25	.62 X .31
VC18	3	-	-	-	38.22	-	-	-	-	-	-	-	35	-	-	-	-	-	-	-	15.5	5	10.25	.62 X .31
EM18	4	-	8	-	28.45	31.47	-	13.25	13.12	-	-	-	-	-	-	-	14.42	-	2.5	-	15.5	5	10.25	.62 X .31

VC MOTOR DIMENSIONS

NEMA FRAME	182	184	213	215	254	256	284	286	324	326	364	365	404	405	444	445	505
AG	13.16	14.16	18.25	19.75	22.31	24.06	24.5	26	27.44	28.94	26	26	28.81	28.81	33	33	35.25