

NOW STOCKED IN CD4MCu

## AVAILABLE MOUNTING CONFIGURATIONS

6NHTB-RP-F REDI-PRIME FRAME MOUNT  
 6NHTB-RP-EM REDI-PRIME ENGINE MOUNT  
 6NHTB-F FRAME MOUNT  
 6NHTB-EM ENGINE MOUNT  
 6NHTB-VF VERTICAL FRAME MOUNT  
 6NHTB-VC VERTICAL COUPLED

## OPERATING LEVELS

<b>MIN FLOW</b>	300 GPM	68 m <sup>3</sup> /h
<b>MAX FLOW</b>	4042 GPM	918 m <sup>3</sup> /h
<b>DISCHARGE SIZE</b>	6"	152 mm
<b>SUCTION SIZE</b>	10"	254 mm
<b>SOLIDS HANDLING</b>	3.38"	86 mm
<b>MAX SPEED</b>	1770 RPM	1770 RPM
<b>SHUT-OFF HEAD</b>	348'	106 m
<b>BEP HEAD</b>	219'	67 m
<b>BEP FLOW</b>	3709 GPM	842 m <sup>3</sup> /h
<b>BEP PERCENT</b>	80%	80%



A typical picture of the pump is shown. Please contact KamalBlower Solutions LLC for further details. All information is approximate and for general guidance only.

PARTS	STANDARD MATERIAL (ALL IRON)	CD4MCU
<b>WEAR RING</b>	CAST IRON	CD4MCU
<b>IMPELLER</b>	CAST IRON	CD4MCU
<b>VOLUTE</b>	CAST IRON	CD4MCU
<b>SHAFT</b>	4140/4142 BD	17-4PH
<b>SHAFT SLEEVE</b>	416 STAINLESS STEEL	17-4PH
<b>SUCTION COVER</b>	CAST IRON	CD4MCU
<b>SEAL HOUSING</b>	CAST IRON	CD4MCU
<b>MECHANICAL SEAL</b>	TYPE 2 TUNGSTEN CARBIDE/SILICON CARBIDE	TYPE 2 TUNGSTEN CARBIDE/SILICON CARBIDE
<b>BEARING FRAME</b>	CAST IRON	CAST IRON

The 6NHTB pump is designed with KamalBlower's renowned quality and durability. It features a 6" discharge, 10" suction, enclosed 2-vane impeller, and a centerline or tangential volute. Frame mount versions use the f-18 bearing frame. Available in All Iron or CD4MCu materials. KamalBlower's patented Cycloseal® design is standard, with a Type 2 single mechanical seal with tungsten carbide vs. silicon carbide seal faces for abrasion resistance.

- Patented Cycloseal® design •
- Redi-Prime® available for fully-automatic continuous priming
- RunDry™ option (Indefinite run dry capability)



AGRICULTURE



FOOD



INDUSTRIAL



MINING



MUNICIPAL



OIL &amp; GAS



REFRIGERATION



RENTAL



# 6NHTB


NEW PAGE

Feet x .305 = Meters  
 Inches x 25.4 = Millimeters  
 GPM x .227 = Cubic Meters/Hour  
 GPM x 3.785 = Liters/Minute  
 HP x .746 = KW

Speed	Impeller Dia.	Style	Solids Dia.	N <sub>S</sub>	Suction	Discharge	No. vanes
VARIOUS	17.50"	ENCLOSED	3.38"	1880	10"	6"	2

SINGLE VOLUTE

MOUNTING CONFIG.: CC, VM, F, VF, EM, VC

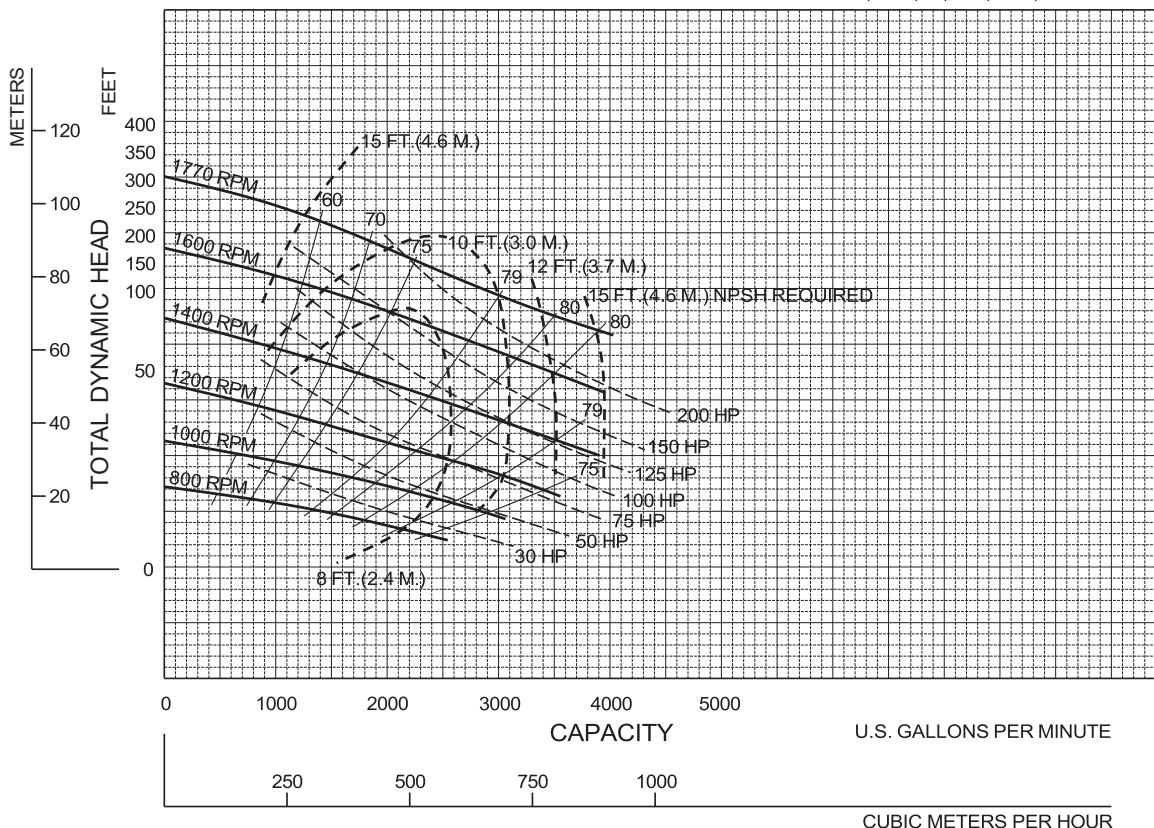

Performances shown are for cool water, close-coupled electric configuration with Cyclopaal.™ Other mounting styles or liquids may require horsepower and/or performance adjustments.

9/99

6NHTBVA

KamalBlower's Solutions LLC ◊

6NHTB - VARIOUS RPM