

AVAILABLE MOUNTING CONFIGURATIONS

2.5HT-CAN SEMI-HERMETIC CLOSE-COUPLED

OPERATING LEVELS

MIN FLOW	50 GPM	3.15 L/S
MAX FLOW	240 GPM	15.14 L/S
DISCHARGE SIZE	2.5"	63.5 mm
SUCTION SIZE	5"	127 mm
MAX SPEED	1800 RPM	1800 RPM
MIN PRESSURE	30 PSID	207 kPa
MAX PRESSURE	71 PSID	490 kPa
MIN NPSHR	1.5'	0.46 m
BEP HEAD	58.4 PSID	402.7 kPa
BEP FLOW	206 GPM	13 L/S
BEP PERCENT	45%	45%



A typical picture of the pump is shown. Please contact Kamal Blower's Pump Company for further details. All information is approximate and for general guidance only.

PARTS	STANDARD MATERIAL (ALL IRON)
IMPELLER	CAST IRON
VOLUTE	DUCTILE IRON
SHAFT	304 STAINLESS STEEL
VALVE	FORGED STEEL
O-RINGS	NEOPRENE
MOTOR	CAN 316 SS WITH CARBON-GRAPHITE BEARINGS

The 2.5HT Hermetic Refrigeration pump is designed with Kamal Blower's renowned quality and durability. It features a 2.5" discharge, a 5" suction, and an enclosed impeller. The four-pole motor is totally enclosed, and liquid cooled. The single stage impeller enhances NPSHr characteristics throughout the entire operating range. Bearings are replaceable, carbon-graphite material, and of a hydrodynamic design.

- Excellent NPSHr •
- 1800/1500 RPM operation speeds for reduced wear •
- Flange to flange drop-in replacement for Kamal Blower's Open Drive Pumps
- Built-in bearing condition indicator
- CSA-Approved motor
- Three-year warranty
- Enhanced vapor handling abilities
- Heavy Duty Construction



AGRICULTURE



FOOD



INDUSTRIAL



MINING



MUNICIPAL



OIL & GAS



REFRIGERATION



RENTAL


Feet x .305 = Meters
Inches x 25.4 = Millimeters
GPM x .227 = Cubic Meters/Hour
GPM x 3.785 = Liters/Minute
HP x .746 = KW

Speed	Impeller Dia.	Style	Solids Dia.	N _S	Suction	Discharge	SG
1760	VARIOUS	ENCLOSED	.44	485	5"	2.5"	0.7

NEW PAGE

SINGLE VOLUTE

MOUNTING CONFIG.: CC

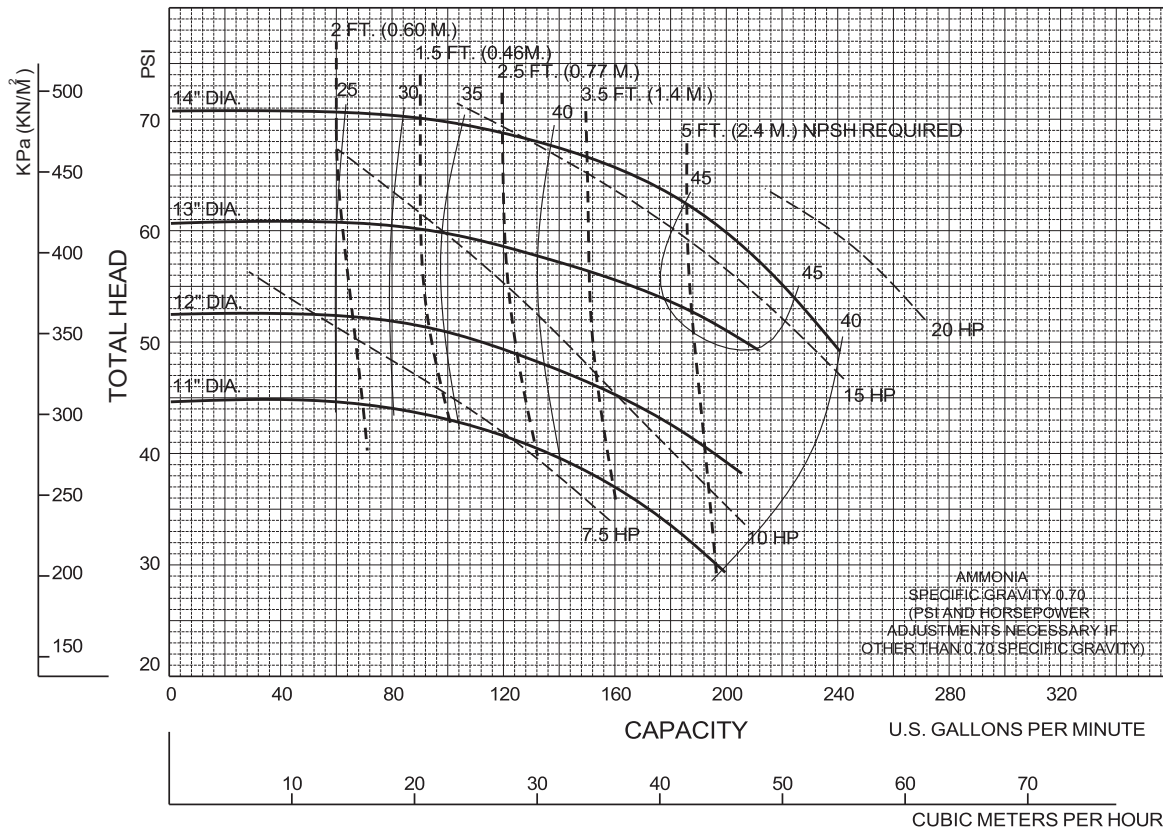

25HT187

9/15/03

Kamal Blower Solutions LLC

2.5HT - 1800 RPM - 0.7 SG

Efficient by Design